

PROGRESS ARCHITECTURE



Mounting system for ceiling panels from welded grid





Bespoke design



Hidden substructure



Building redevelopment



No visible divisions



Eco-friendly



Vandal-resistant



Vertical and diagonal panels



A1 - A2 fire classification



Installation at any angle



Quick access



DESCRIPTION

PROCLIP-C system is designed for the installation of ceiling panels of welded grids. The grid is formatted by cutting. Panels are fixed to the substructure with dedicated mounting brackets and safety wires . Disassembly of individual panels does not cause the remaining panels to move. The assembled panels continue the grid pattern and form a uniform surface without clear divisions.

TECHNICAL PARAMETERS

Max. panel width:	1 200 mm*
Max. panel length:	1 200 mm*
Infill type:	welded grid
Infill material:	according to the product technical card
Surface finishing:	powder coating

* the size of the panels can be individually adapted to the shape and dimensions of the room.

GUIDELINES

The perpendicular dimension of the panels to the profiles is a multiple of the slot of the welded grid.


The ceiling substructure includes a two-level configuration in the cross alignment or one-level configuration in the parallel alignment. The grid is suspended to the ceiling with hangers.

APPLICATIONS


Metal ceilings

PROCLIP-C

MOUNTING SYSTEM FOR WELDED GRIDS

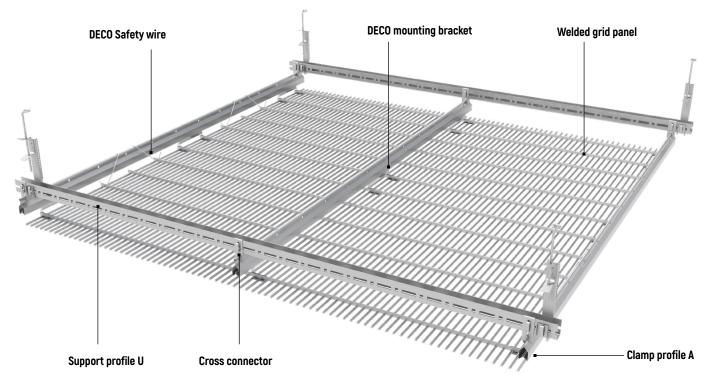

Two-level configuration in the cross alignment

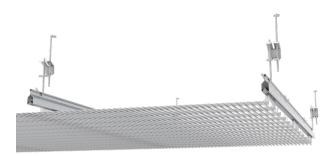

One-level configuration in the parallel alignment

RECOMMENDED GRID MODELS

WELDED GRIDS

RADIUS Z10155 RADIUS Z10105 RADIUS Z10080 RADIUS Z07065 RADIUS Z07115 RADIUS Z07165

